

### 普通



公差范围	
J=±5%	K=±10%
L=±15%	M=±20%
P=±25%	N=±30%

### 外观尺寸

Recommended Layout

A Max.	B Max.	C Max.	D Nom.	E Nom.	F Nom.	G Nom.	H Nom.	I Nom.
12.95	9.40	3.50	7.62	2.54	2.54	2.92	7.37	2.79

### 包装

Type	Quantity (per reel)
WBP3308F	1000个/卷
WBP3316F	750个/卷
WBP3340F	250个/卷
WBP5022F	400个/卷

### 特性参数

Part Number	Inductance LO (uH)	DCR (Ω) Max.	SRF (MHz) Typ.	I <sub>sat</sub> (A) Max.	I <sub>rms</sub> (A) Max.
WBP3308F-100M-R	10.00	0.11	35.00	2.40	2.00
WBP3308F-150M-R	15.00	0.15	33.00	2.00	1.50
WBP3308F-220M-R	22.00	0.23	25.00	1.60	1.30
WBP3308F-330M-R	33.00	0.30	19.00	1.40	1.10
WBP3308F-470M-R	47.00	0.39	14.00	1.00	0.80
WBP3308F-680M-R	68.00	0.66	12.00	0.90	0.70
WBP3308F-101K-R	100.00	0.84	10.00	0.70	0.60
WBP3308F-151K-R	150.00	1.20	8.00	0.60	0.50
WBP3308F-221K-R	220.00	1.90	8.00	0.50	0.40
WBP3308F-331K-R	330.00	2.70	5.00	0.40	0.30
WBP3308F-471K-R	470.00	4.00	4.00	0.30	0.20
WBP3308F-681K-R	680.00	5.30	3.00	0.20	0.10
WBP3308F-102K-R	1000.00	8.40	2.50	0.10	0.05

测试频率：100uH以下100kHz/0.25V, 100uH及以上1kHz/0.3V

### 普通



公差范围	
J=±5%	K=±10%
L=±15%	M=±20%
P=±25%	N=±30%

### 外观尺寸

A Max.	B Max.	C Max.	D Nom.	E Nom.	F Nom.	G Nom.	H Nom.	I Nom.
12.95	9.40	5.21	7.62	2.54	2.54	2.92	7.37	2.79

### 包装

Type	Quantity (per reel)
WBP3308F	1000个/卷
WBP3316F	750个/卷
WBP3340F	250个/卷
WBP5022F	400个/卷

### 特性参数

Part Number	Inductance LO (uH)	DCR (Ω) Max.	SRF (MHz) Typ.	I <sub>sat</sub> (A) Max.	I <sub>rms</sub> (A) Max.
WBP3316F-1R0M-R	1.00	0.01	100.00	9.00	6.80
WBP3316F-1R5M-R	1.50	0.01	90.00	8.00	6.40
WBP3316F-2R2M-R	2.20	0.01	80.00	7.00	6.10
WBP3316F-3R3M-R	3.30	0.02	65.00	6.40	5.40
WBP3316F-4R7M-R	4.70	0.02	45.00	5.40	4.80
WBP3316F-6R8M-R	6.80	0.03	38.00	4.60	4.40
WBP3316F-100M-R	10.00	0.04	30.00	3.80	3.90
WBP3316F-150M-R	15.00	0.05	27.00	3.00	3.10
WBP3316F-220M-R	22.00	0.09	19.00	2.60	2.70
WBP3316F-330M-R	33.00	0.10	15.00	2.00	2.10
WBP3316F-470M-R	47.00	0.14	12.00	1.60	1.80
WBP3316F-680M-R	68.00	0.20	10.00	1.40	1.50
WBP3316F-101K-R	100.00	0.28	9.00	1.20	1.30
WBP3316F-151K-R	150.00	0.40	6.00	1.00	1.00
WBP3316F-221K-R	220.00	0.61	5.00	0.80	0.80
WBP3316F-331K-R	330.00	1.02	4.50	0.60	0.60
WBP3316F-471K-R	470.00	1.27	3.50	0.50	0.50
WBP3316F-681K-R	680.00	2.02	2.50	0.40	0.40
WBP3316F-102K-R	1000.00	3.00	2.00	0.30	0.30

测试频率: 100uH以下100kHz/0.25V, 100uH及以上1kHz/0.3V

### 普通



公差范围	
J=±5%	K=±10%
L=±15%	M=±20%
P=±25%	N=±30%

### 外观尺寸

A Max.	B Max.	C Max.	D Nom.	E Nom.	F Nom.	G Nom.	H Nom.	I Nom.
12.95	9.40	11.43	7.62	2.54	2.54	2.92	7.37	2.79

### 包装

Type	Quantity (per reel)
WBP3308F	1000个/卷
WBP3316F	750个/卷
WBP3340F	250个/卷
WBP5022F	400个/卷

### 特性参数


Part Number	Inductance LO (uH)	DCR (Ω) Max.	SRF (MHz) Typ.	I <sub>sat</sub> (A) Max.	I <sub>rms</sub> (A) Max.
WBP3340F-100M-R	10.00	0.04	22.00	8.00	3.50
WBP3340F-150M-R	15.00	0.05	18.00	7.00	3.00
WBP3340F-220M-R	22.00	0.07	11.00	5.50	2.50
WBP3340F-330M-R	33.00	0.08	9.00	4.00	2.00
WBP3340F-470M-R	47.00	0.11	8.00	3.80	1.60
WBP3340F-680M-R	68.00	0.17	7.00	3.00	1.20
WBP3340F-101K-R	100.00	0.22	5.00	2.50	1.20
WBP3340F-151K-R	150.00	0.34	4.00	2.00	0.90
WBP3340F-221K-R	220.00	0.44	3.50	1.60	0.70
WBP3340F-331K-R	330.00	0.70	2.50	1.20	0.60
WBP3340F-471K-R	470.00	0.95	2.00	1.00	0.30
WBP3340F-681K-R	680.00	1.20	2.00	1.00	0.20
WBP3340F-102K-R	1000.00	2.00	1.50	0.80	0.10

测试频率: 100uH以下100kHz/0.25V, 100uH及以上1kHz/0.3V

### 普通



### 外观尺寸

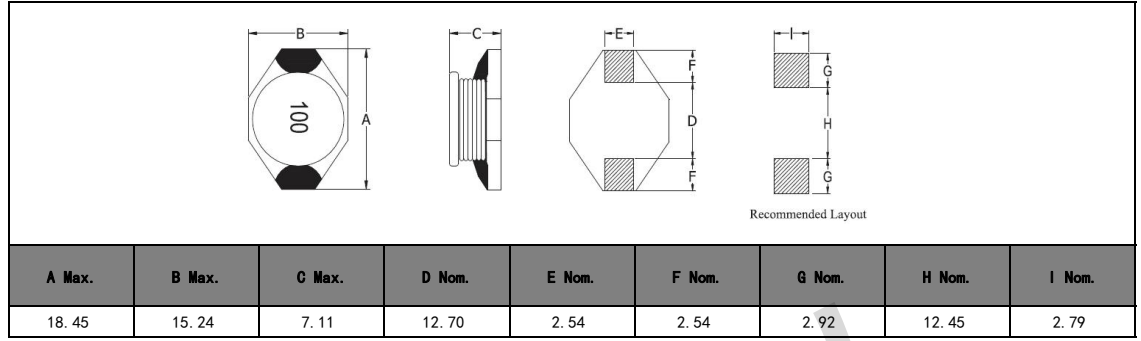

### 包装

Type	Quantity (per reel)
WBP3308F	1000个/卷
WBP3316F	750个/卷
WBP3340F	250个/卷
WBP5022F	400个/卷

### 特性参数

Part Number	Inductance LO (uH)	DCR (Ω) Max.	SRF (MHz) Typ.	I <sub>sat</sub> (A) Max.	I <sub>rms</sub> (A) Max.
WBP5022F-1R0M-R	1.00	0.01	80.00	20.00	8.60
WBP5022F-2R2M-R	2.20	0.01	80.00	16.00	7.10
WBP5022F-3R3M-R	3.30	0.02	60.00	14.00	6.20
WBP5022F-5R6M-R	5.60	0.02	40.00	12.00	5.30
WBP5022F-100M-R	10.00	0.03	30.00	10.00	4.30
WBP5022F-150M-R	15.00	0.04	22.00	8.00	4.00
WBP5022F-220M-R	22.00	0.05	20.00	7.00	3.50
WBP5022F-330M-R	33.00	0.07	15.00	5.50	3.00
WBP5022F-470M-R	47.00	0.09	9.00	4.50	2.60
WBP5022F-680M-R	68.00	0.13	8.00	3.50	2.30
WBP5022F-101K-R	100.00	0.19	7.00	3.00	1.80
WBP5022F-151K-R	150.00	0.25	6.00	2.60	1.50
WBP5022F-221K-R	220.00	0.38	5.00	2.40	1.20
WBP5022F-331K-R	330.00	0.56	4.00	1.90	1.00
WBP5022F-471K-R	470.00	0.85	3.00	1.40	0.82
WBP5022F-681K-R	680.00	1.10	2.50	1.20	0.72
WBP5022F-102K-R	1000.00	1.80	2.00	1.00	0.56

测试频率：100uH以下100kHz/0.25V, 100uH及以上1kHz/0.3V