


普通



公差范围

J=±5%	K=±10%
L=±15%	M=±20%
P=±25%	N=±30%

外观尺寸

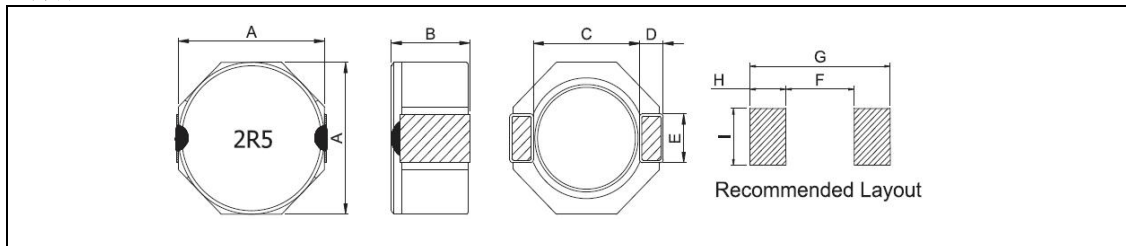								
A ±0.3	B Max.	C Nom.	D Nom.	E Nom.	F Nom.	G Nom.	H Nom.	I Nom.
8.00	3.20	6.30	1.20	2.50	6.10	10.10	2.00	2.80

包装

Type	Quantity (per reel)
WBD8D28	1000个/卷
WBD8D38	1000个/卷
WBD8D43	1000个/卷
WBD8D58	800个/卷

特性参数

Part Number	Inductance L0 (uH)	DCR (Ω) Max.	Rated Current (A) Max.
WBD8D28-2R0N-R	2.00	0.02	5.00
WBD8D28-2R5N-R	2.50	0.02	4.50
WBD8D28-3R5N-R	3.50	0.03	4.00
WBD8D28-4R7N-R	4.70	0.04	3.40
WBD8D28-6R2N-R	6.20	0.05	3.00
WBD8D28-7R3N-R	7.30	0.06	2.80
WBD8D28-100M-R	10.00	0.08	2.50
WBD8D28-150M-R	15.00	0.11	1.90
WBD8D28-220M-R	22.00	0.16	1.60
WBD8D28-330M-R	33.00	0.21	1.30
WBD8D28-470M-R	47.00	0.31	1.15
WBD8D28-680M-R	68.00	0.43	0.92
WBD8D28-101M-R	100.00	0.56	0.75

测试频率: 100uH以下100kHz/0.25V, 100uH及以上1kHz/0.3V


普通



公差范围

J=±5%	K=±10%
L=±15%	M=±20%
P=±25%	N=±30%

外观尺寸

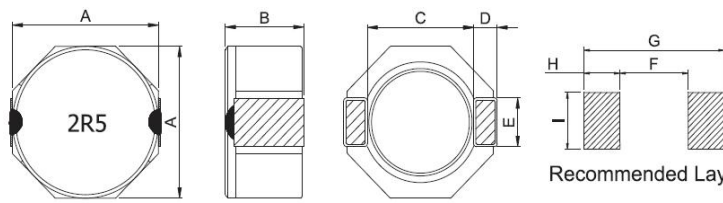 Recommended Layout								
A ±0.3	B Max.	C Nom.	D Nom.	E Nom.	F Nom.	G Nom.	H Nom.	I Nom.
8.00	4.20	6.30	1.20	2.50	6.10	10.10	2.00	2.80

包装

Type	Quantity (per reel)
WBD8D28	1000个/卷
WBD8D38	1000个/卷
WBD8D43	1000个/卷
WBD8D58	800个/卷

特性参数

Part Number	Inductance L0 (uH)	DCR (Ω) Max.	Rated Current (A) Max.
WBD8D38-1R8N-R	1.80	0.02	7.00
WBD8D38-2R5N-R	2.50	0.02	6.50
WBD8D38-3R5N-R	3.50	0.02	5.00
WBD8D38-4R7N-R	4.70	0.03	4.60
WBD8D38-100M-R	10.00	0.05	3.00
WBD8D38-150M-R	15.00	0.07	2.75
WBD8D38-220M-R	22.00	0.11	2.30
WBD8D38-330M-R	33.00	0.16	1.75
WBD8D38-470M-R	47.00	0.19	1.52
WBD8D38-680M-R	68.00	0.29	1.30
WBD8D38-101M-R	100.00	0.41	1.05

测试频率: 100uH以下100kHz/0.25V, 100uH及以上1kHz/0.3V


普通



公差范围

J=±5%	K=±10%
L=±15%	M=±20%
P=±25%	N=±30%

外观尺寸

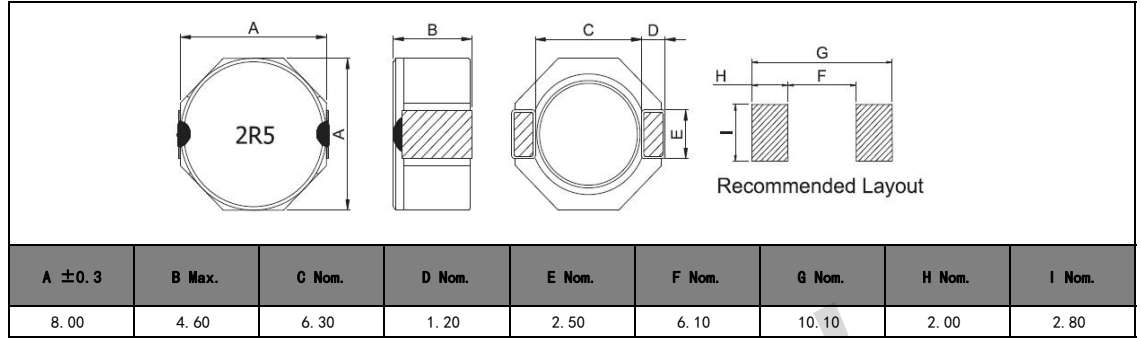

包装

Type	Quantity (per reel)
WBD8D28	1000个/卷
WBD8D38	1000个/卷
WBD8D43	1000个/卷
WBD8D58	800个/卷

特性参数

Part Number	Inductance L0 (uH)	DCR (Ω) Max.	Rated Current (A) Max.
WBD8D43-2R0N-R	2.00	0.02	7.00
WBD8D43-3R3N-R	3.30	0.03	6.00
WBD8D43-3R9N-R	3.90	0.03	4.50
WBD8D43-4R7N-R	4.70	0.03	4.30
WBD8D43-6R2N-R	6.20	0.04	4.00
WBD8D43-100M-R	10.00	0.06	3.08
WBD8D43-150M-R	15.00	0.08	2.24
WBD8D43-220M-R	22.00	0.12	2.00
WBD8D43-330M-R	33.00	0.16	1.50
WBD8D43-470M-R	47.00	0.23	1.33
WBD8D43-680M-R	68.00	0.28	1.12
WBD8D43-101M-R	100.00	0.44	0.91

测试频率：100uH以下100kHz/0.25V，100uH及以上1kHz/0.3V


普通



公差范围

J=±5%	K=±10%
L=±15%	M=±20%
P=±25%	N=±30%

外观尺寸

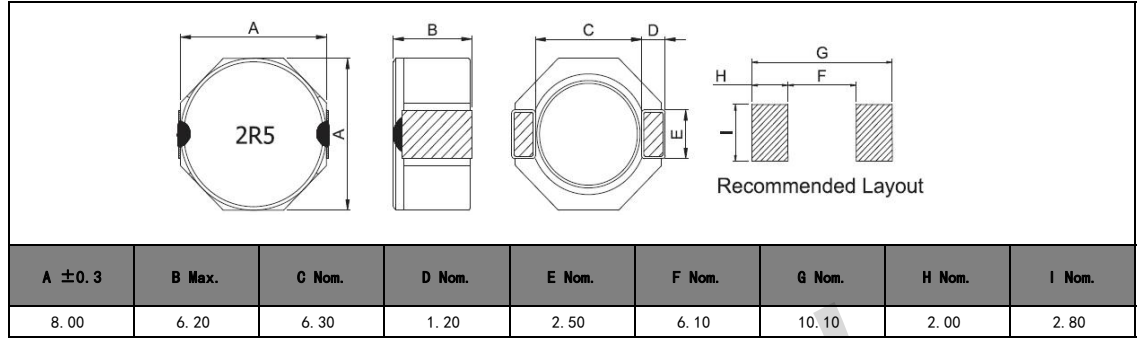

包装

Type	Quantity (per reel)
WBD8D28	1000个/卷
WBD8D38	1000个/卷
WBD8D43	1000个/卷
WBD8D58	800个/卷

特性参数

Part Number	Inductance L0 (uH)	DCR (Ω) Max.	Rated Current (A) Max.
WBD8D58-3R9N-R	3.90	0.02	4.10
WBD8D58-5R0N-R	5.00	0.02	3.80
WBD8D58-6R2N-R	6.20	0.02	3.30
WBD8D58-100M-R	10.00	0.03	2.60
WBD8D58-150M-R	15.00	0.04	2.30
WBD8D58-220M-R	22.00	0.05	1.70
WBD8D58-330M-R	33.00	0.07	1.50
WBD8D58-470M-R	47.00	0.09	1.20
WBD8D58-680M-R	68.00	0.13	1.00
WBD8D58-101M-R	100.00	0.18	0.80

测试频率: 100uH以下100kHz/0.25V, 100uH及以上1kHz/0.3V